



VHF AND UHF TRANSCEIVERS

IC-F70DT

(P25 digital VHF transceiver with 10-keypad)

IC-F70T

(VHF transceiver with 10-keypad)

IC-F70DS

(P25 digital VHF transceiver without 10-keypad)

IC-F70S

(VHF transceiver without 10-keypad)

IC-F80DT

(P25 digital UHF transceiver with 10-keypad)

IC-F80T

(UHF transceiver with 10-keypad)

IC-F80DS

(P25 digital UHF transceiver without 10-keypad)

IC-F80S

(UHF transceiver without 10-keypad)

DIGITAL



IC-F70DT/DS,
IC-F80DT/DS only.



Icom Inc.

The Smart Migration to an APCO P25 Digital Radio System



Icom provides an intelligent solution for digital migration to an APCO P25 digital radio system from an existing analog system in the IC-F70D/F80D series. Programmable conventional P25 digital and/or FM analog mode per channel, Flash ROM CPU for future upgrades allows you to tailor the system you connect. Moreover, advanced mechanical and analog features such as rugged waterproof construction, built-in multiple signalings and a large capacity Lithium-Ion battery pack satisfy the needs of current analog users. Icom is the smart choice for current – and future – public safety communication needs.

IPX7 waterproof protection

The water removal design from the speaker grill keeps the communication clear, no matter what the elements are. The IC-F70/F80 series has waterproof construction that is sealed with waterproof gaskets.

* According to the International Standard IEC 60529 (2001). 1m depth for 30 minutes.

Built-in multiple signaling

Use the built-in CTCSS, DTCS, 2-Tone, 5-Tone and BIIS capability to set up your own talk groups and quiet stand-by when others are talking. You can also set up selective calls to individuals or control a repeater.

Multiple 2-Tone, Multiple 5-Tone

Up to 10 2-Tone and 8 5-Tone codes can be decoded on a single memory channel. This is perfect for professionals who require multiple district paging on one channel. When a matched tone is received, the following items are programmable for each code.

- Bell icon
- Answer back
- Stun
- Beep sound
- Auto transmit
- Scan

VHF TRANSCEIVERS

IC-F70DT/T

P25 digital/analog FM with 10-keypad

IC-F70DS/S

P25 digital/analog FM without 10-keypad

UHF TRANSCEIVERS

IC-F80DT/T

P25 digital/analog FM with 10-keypad

IC-F80DS/S

P25 digital/analog FM without 10-keypad


Project 25 (P25) Digital Features



Upgrade to digital option

The IC-F70/F80 series offers you three choices to P25 digital compatibility. Choice one is P25 compliant from the factory. Choice two is a digital hardware radio and you can install the P25 activation software (EX-2785 J01) later. Choice three is analog only radio and you can install the DSP unit, UT-120 and P25 activation software (EX-2785 J01) later.

System upgrade chart

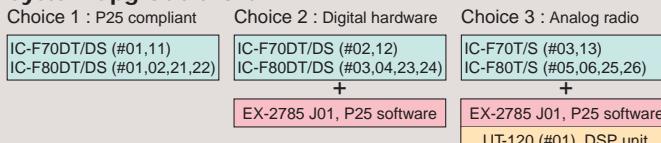

AES/DES digital encryption activation software

AES and DES are encryption standards required by public safety agencies. The IC-F70D, F80D series provide secure encryption with DES and AES accordingly when activated with EX-2785 J02 (for DES) and EX-2785 J03 (for AES) activation software.

Interoperability

The IC-F70D, F80D series is APCO Project 25 (P25) compliant. It ensures interoperability with other manufacturer's P25 digital radios in conventional mode. Program digital and/or analog FM modes per channel. The mixed mode scan allows you to detect and receive both analog FM and P25 digital modes and to transmit either mode depending on programming.

Advanced Mechanical and Analog Features

Li-Ion battery pack

The large capacity 1600mAh Lithium-Ion (Li-Ion) battery pack, BP-235 provides a practical 8 hours* of operating time. Li-Ion batteries allow flexible charging and have almost no memory effect.

* Typical operation Tx:Rx: Stand-by=5:5:90

Alphanumeric display

The large high contrast LCD clearly shows a variety of information with a full dot-matrix display. Program the display to show either 1 line with 12 characters or 2 lines with 24 characters. The functions assigned to the P buttons (P0-P3) are shown at the bottom of the display.



The bottom side shows the assigned functions.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



BP-235 Li-Ion BATTERY PACK, 7.4V/1600mAh
Provides 8 hours operating time* (approx.).

BP-236 Li-Ion BATTERY PACK, 7.4V/2400mAh
Provides 12 hours operating time* (approx.).

BP-237 BATTERY CASE: AA (LR6)x6 alkaline cells.
BP-237 is water-resistant, equivalent to IPX4.

* Tx: Rx: standby=5:5:90.

RAPID CHARGER



BC-119N DESKTOP CHARGER + AD-110 CHARGER ADAPTER

+ BC-145A AC ADAPTER

Rapidly charges the BP-235 in 2.5 hours and BP-236 in 3.5 hours.

CP-17L : CIGARETTE LIGHTER CABLE OPC-515L : DC POWER CABLE
For use with the BC-119N. (12-16V DC required)

MULTI-CHARGER



BC-121N MULTI-CHARGER + AD-110 CHARGER ADAPTER

+ BC-157 AC ADAPTER

Rapid charges up to 6 battery packs (Six AD-110s are required) in 2.5–3.5 hours.

OPC-656 DC POWER CABLE; For use with the BC-121N. (12–20V DC required).



HM-138: Full sized, waterproof construction equivalent to IPX7. (1 m/30 min.).



HS-94: Earhook headset with flexible boom microphone.
HS-95: Behind-the-head headset with flexible boom microphone.
HS-97: Throat microphone fits around your neck and picks up speech vibration.

VS-1SC: PTT/VOX unit. Required when using these headsets.

BELT CLIPS

MB-93 : Swivel type belt clip.

MB-94 : Alligator type. Same as supplied.

LEATHER BELT HANGERS

MB-96N : Swivel type belt hanger.

MB-96F : Fixed type belt hanger. For use with MB-94.

ACTIVATION SOFTWARE

EX-2785 J01 : P25 ACTIVATION SOFTWARE

EX-2785 J02 : DES ACTIVATION SOFTWARE

EX-2785 J03 : AES ACTIVATION SOFTWARE

INTERNAL UNITS

UT-109 : Provides 32 non-rolling type scrambling codes. Version 02 required.

UT-110 : Provides 1020 rolling type scrambling codes. Version 02 required.

UT-111 : Provides LTR® trunking capabilities.

UT-120 : Provides P25 hardware capabilities.

Version 01 required.

Optional internal unit should be installed at an authorized Icom service center only.

INTERFACE AND ZONE COPY CABLES

OPC-966 : RS-232C interface cable for connecting with a PC.

OPC-1533: Handy to mobile zone copy cable

OPC-1536: Handy to handy zone copy cable

STUBBY ANTENNAS

• FA-SC56V5 : 150–162MHz

• FA-SC57V5 : 160–174MHz

• FA-SC73US : 450–490MHz

ANTENNAS

• FA-SC25V : 136–150MHz

• FA-SC55V : 150–174MHz

• FA-SC25U : 400–430MHz

• FA-SC73U : 430–470MHz

• FA-SC72U : 470–520MHz

ANTENNA ADAPTER

AD-98FSC : Allows you to connect a BNC-type antenna.

(For maintenance use only)

SPECIFICATIONS

| GENERAL | | |
|---|---------------------|---|
| • Frequency range | : | |
| IC-F70T/S, F70DT/DS | 136–174MHz | |
| IC-F80T/S, F80DT/DS | 400–470MHz | |
| | 450–520MHz | |
| • Number of channels | : | 256 channels/32 zones |
| • Channel spacing | : | 12.5kHz/25kHz, 15kHz/30kHz |
| • PLL channel step | : | 2.5kHz, 3.125kHz (VHF) 5kHz, 6.25kHz (UHF) |
| • Antenna impedance | : | 50Ω |
| • Operating Temp. range | : | -30°C to +60°C; -22°F to +140°F |
| • Power supply requirement | : | 7.2V DC |
| • Output power and current drain (at 7.2V DC; approx.): | | |
| | IC-F70, F70D | IC-F80, F80D |
| Output power | 5W | 4W |
| Transmit | High Low (1W) | 2.2A 1.5A |
| Receive | AF max. stand-by | 450mA 150mA |

- Dimensions (with battery pack): 58.6 (W) × 152 (H) × 38 (D) mm;
(projections are not included) 2½ (W) × 5¾ (H) × 1½ (D) in
- Weight (approx.) : 400g; 14.1oz (with BP-235)
430g; 15.6oz (with BP-236)

TRANSMITTER

- Max. frequency deviation : ±5.0/2.5kHz (Wide/narrow)
- Frequency error : ±2.0ppm
- Spurious emissions : 70dB typ.
- Adjacent channel power : 70/60dB min. (Wide/narrow)
- FM Hum and Noise :

 - VHF 45/40dB typ. (Wide/narrow)
 - UHF 40/35dB typ. (Wide/narrow)

- Audio harmonic distortion : 3% typ. (AF 1kHz, 40% deviation)
- Modulation limiting : 60–100% of max. deviation
- Ext. microphone connector : 9-pin multi connector/2.2kΩ

Measurements made in accordance with EIA-152C/204D, TIA-603.
All stated specifications are subject to change without notice or obligation.

LTR is a registered trademark of E.F. Johnson Company.

All other trademarks are the properties of their respective holders.

| RECEIVER | | |
|--------------------------------------|---------------------|---|
| • Intermediate frequency | : | 1st 46.35MHz 2nd 450kHz |
| • Sensitivity | : | |
| | Analog (12dB SINAD) | 0.25µV typ. |
| | Digital (5% BER) | 0.25µV typ. |
| • Squelch sensitivity (at threshold) | : | 0.25/0.32µV typ. (VHF/UHF) |
| • Adjacent channel selectivity | : | |
| | Analog VHF | 80/73dB typ. (Wide/narrow) |
| | UHF | 78/70dB typ. (Wide/narrow) |
| | Digital VHF/UHF | 60dB typ. |
| • Spurious response | : | 80/75dB typ. (VHF/UHF) |
| • Intermodulation | : | 75dB typ. |
| • Hum and noise ratio | : | 45/40dB typ. (Wide/narrow) |
| • Audio output power | : | 500mW typ. (at 10% distortion with an 8Ω load) |
| • External speaker connector | : | 9-pin multi connector/8Ω |

Applicable U.S. Military Specifications

| Standard | MIL 810C | | MIL 810D | | MIL 810E | | MIL 810F | |
|-----------------|----------|----------|----------|---------|----------|---------|----------|--------|
| | Method | Proc. | Method | Proc. | Method | Proc. | Method | Proc. |
| Low Pressure | 500.1 | I | 500.2 | I, II | 500.3 | I, II | 500.4 | I, II |
| High Temp. | 501.1 | I | 501.2 | I, II | 501.3 | I, II | 501.4 | I, II |
| Low Temp. | 502.1 | I | 502.2 | I, II | 502.3 | I, II | 502.4-3 | I, II |
| Temp. Shock | 503.1 | I | 503.2 | I | 503.3 | I | 503.4 | I |
| Solar Radiation | 505.1 | I | 505.2 | I | 505.3 | I | 505.4 | I |
| Rain | 506.1 | I, II | 506.2 | I, II | 506.3 | I, II | 506.4 | I, III |
| Humidity | 507.1 | I, II | 507.2 | II, III | 507.3 | II, III | 507.4 | — |
| Salt Fog | 509.1 | I | 509.2 | I | 509.3 | I | 509.4 | — |
| Dust Blowing | 510.1 | I | 510.2 | I | 510.3 | I | 510.4 | I |
| Immersion | 512.1 | I | 512.2 | I | 512.3 | I | 512.4 | I |
| Vibration | 514.2 | VIII, X | 514.3 | I | 514.4 | I | 514.5 | I |
| Shock | 516.2 | I, II, V | 516.3 | I, IV | 516.4 | I, IV | 516.5 | I, IV |

Supplied accessories: (May differ according to version)

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
Unit 1 / 103 Garden Road,
Clayton VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,
Kent, CT6 8LD, U.K.
Phone : +44 (09) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, 1,
Rue Brindejone des Moulinais BP 5804,
31505 Toulouse Cedex, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Your local distributor/dealer:

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Icom Spain S.L.

Ctra. Rubí, No. 88 "Edificio Can Castanyer"
08190, Sant Cugat del Valles, Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom Polska

Sopot, 3 maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl
URL : <http://www.icompolska.com.pl>